



DCT-ST3012D1

SUBWOOFER DANYCATECH 12" 3000RMS




SPECIFICATIONS

Power	6000 WATTS
RMS Power	3000 RMS
Impedance	1+1 Ohm
Resonance Frequency	35,5 (Hz)
Frequency Response	20-120 Hz
Voice Coil Diameter	4 inch
Sensitivity	86,6 dB
Magnet	405 Oz

MOUNTING INFORMATION

Diameter A	mm	325
Diameter B	mm	303
Diameter C	mm	286
Diameter D	mm	260
Depth E	mm	95
Depth F	mm	17
Depth G	mm	195
Depth H	mm	223
Vd	L	7,908
Nt Wt.	Kg	26,7

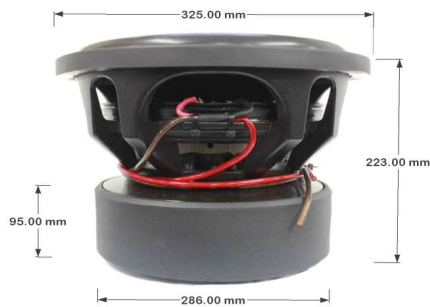

THIELE SMALL PARAMETERS (PARALLEL)

FS Hz	35,5
Vas (L)	20,3
Dcr (Ohm)	0,4
Qms	4,986
Qes	0,414
Qts	0,382
BL (T/m)	8,782
Mms (g)	348,4
Xmax (mm)	17,5
Xmech (mm)	42,5
SD (msqM)	51,071

THIELE SMALL PARAMETERS (SERIES)

FS Hz	35,2
Vas (L)	20,1
Dcr (Ohm)	1,6
Qms	4,913
Qes	0,402
Qts	0,372
BL (T/m)	19,087
Mms (g)	356
Xmax (mm)	17,5
Xmech (mm)	42,5
SD (msqM)	51,071