



DCT-ST812D2

SUBWOOFER DANYCATECH 12" 800RMS




SPECIFICATIONS

Power	1600 WATTS
RMS Power	800 RMS
Impedance	2+2 Ohm
Resonance Frequency	36,7 (Hz)
Frequency Response	20-120 Hz
Voice Coil Diameter	3 inch
Sensitivity	84,2 dB
Magnet	150 Oz

MOUNTING INFORMATION

Diameter A	mm	325
Diameter B	mm	303
Diameter C	mm	286
Diameter D	mm	176
Depth E	mm	70
Depth F	mm	17
Depth G	mm	170
Depth H	mm	196
Vd	L	4,567
Nt Wt.	Kg	10,8

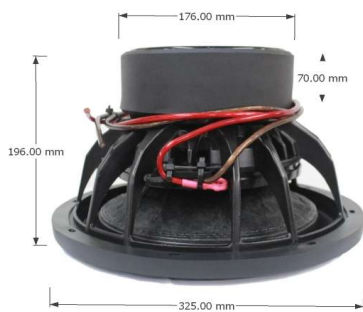

THIELE SMALL PARAMETERS (PARALLEL)

FS Hz	36,7
Vas (L)	25,3
Dcr (Ohm)	0,9
Qms	6,014
Qes	0,725
Qts	0,647
BL (T/m)	9,229
Mms (g)	297,8
Xmax (mm)	14
Xmech (mm)	36
SD (msqM)	53,093

THIELE SMALL PARAMETERS (SERIES)

FS Hz	36,2
Vas (L)	24,8
Dcr (Ohm)	3,8
Qms	5,305
Qes	0,704
Qts	0,621
BL (T/m)	19,56
Mms (g)	311,5
Xmax (mm)	14
Xmech (mm)	36
SD (msqM)	53,093