




DCT-MFL64

PROFESSIONAL SPEAKER

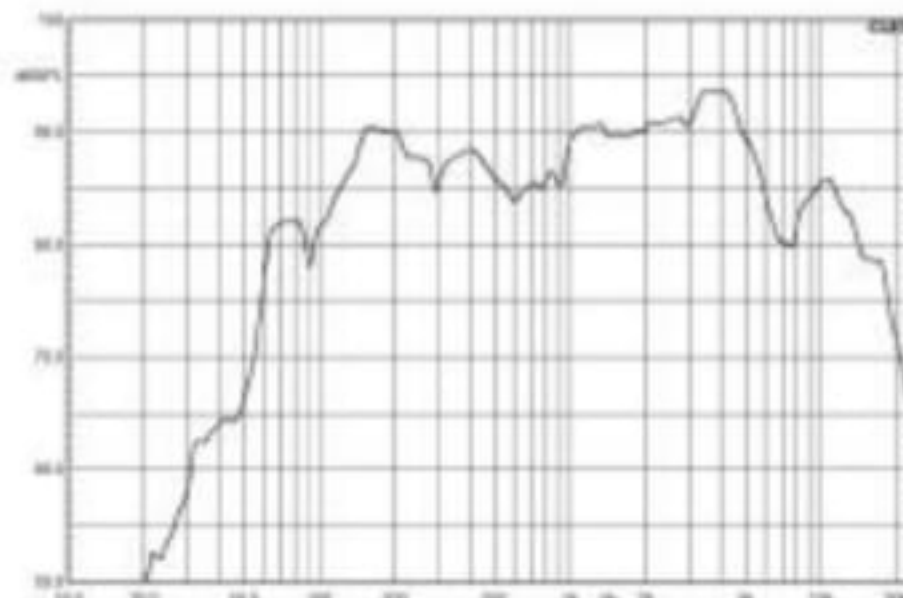

SPECIFICATION

Power	600 Watts
RMS Power	150 Watts
Impedance	4 Ohm
Resonance(natural) Frequency	115 Hz
Frequency Response	115-13000 Hz
Voice Coil Diameter	38.6mm (1.5 in)
Sensitivity	96 dB
Magnet	20 Oz

MOUNTING INFORMATION

Overall Diameter	6.5/166	in/mm
Bolt Circle Diameter	6.1/155	in/mm
Baffle cutout Diameter	5.6/142	in/mm
Overall Depth	3.1/80	in/mm
Net Weight	3.64 /1.65	Lbs/kgs

SHIPPING INFORMATION

Shipping Weight	4.08/1.85	Lbs/kgs
Shipping Box	15.9X7.8X3.5/405X200X90	in/mm

THIELE SMALL PARAMETERS

FS Hz	115 Hz
Vas	5 L
RE Ohms	3.6 ohm
Qms	10
Qes	0.8
Qts	0.77
BL T/m	5 T/m
MMS(grms)	7.5 grams
Xmax(mm)	2.5mm
Sd(cm ²)	127 cm ²
Efficiency %	1.1 %
Le(1k Hz)	0.2 mH
EBP	168